

iPC Series Portable Bench Scales



PART #	CAPACITY
Single Display	
75466	100 oz
Single Display, Multi-ranging	
75454	6 lb (3 kg)
75455	15 lb (6 kg)
75457	30 lb (15 kg)
75458	60 lb (30 kg)
Dual Display	
75468	100 oz
Dual Display, Multi-ranging	
75460	6 lb (3 kg)
75461	15 lb (6 kg)
75462	30 lb (15 kg)
75464	60 lb (30 kg)

Offering a sleek design, simple operation, and pinpoint accuracy, the iPC delivers convenient 4-button operation and optional dual displays. These features simplify processes for users and offer highly visible weight read-outs for customers. Perfect wherever quick, accurate weighments are needed, the iPC excels in applications such as bakeries, restaurants and mailrooms.

The iPC is NTEP certified and operates on either batteries or AC adapter, providing the versatility for use at remote locations such as farmers markets and roadside stands.

Applications

- Bakery, deli, and specialty food stores
- Farmers market and roadside stands
- Restaurants
- Mailrooms

Standard Features

- Six-digit Liquid Crystal Display (LCD)
- Powered by two "D" cell batteries (up to 500 hours operation)
- Auto power-off function
- Low battery indicator
- Overload stops

Options/Accessories

- 75470.....Stainless steel platter cover (100 oz, 6 lb, and 15 lb capacity)
- 75739.....Stainless steel platter cover (30 lb and 60 lb capacity)
- 75473.....AC adapter
- 75889.....Additional operating manual



iPC with dual display

PLATTER SIZE:

- 100 oz: 9.1" x 7.8" (231 mm x 198.1 mm)
- 6 lb (3 kg): 9.1" x 7.8" (231 mm x 198.1 mm)
- 15 lb (6 kg): 9.1" x 7.8" (231 mm x 198.1 mm)
- 30 lb (15 kg): 11" x 11.5" (279.4 mm x 292.1 mm)
- 60 lb (30 kg): 11" x 11.5" (279.4 mm x 292.1 mm)

DISPLAY:

Six digits (7-segment), LCD
 Character height: 1" (25.4 mm)

KEYBOARD:

Zero, tare, on/off, unit (lb/kg)

NOTE: oz version only displays weight in oz

DIVISIONS (AUTO RANGING):

- 100 oz: 0.05 oz from 0 – 50 oz, 0.1 oz from 50 – 100oz
- 6 lb (3 kg): 0.002 lb (0.001 kg) from 0 – 3 lb (0 – 1.5 kg),
0.005 lb (0.002 kg) from 3 – 6 lb (1.5 – 3 kg)
- 15 lb (6 kg): 0.005 lb (0.002 kg) from 0 – 6 lb (0 – 3 kg),
0.01 lb (0.005 kg) from 6 – 15 lb (3 – 6 kg)
- 30 lb (15 kg): 0.01 lb (0.005 kg) from 0 – 15 lb (0 – 7.5 kg),
0.02 lb (0.01 kg) from 15 – 30 lb (7.5 – 15 kg)
- 60 lb (30 kg): 0.02 lb (0.01 kg) from 0 – 30 lb (0 – 15 kg),
0.05 lb (0.02 kg) from 30 – 60 lb (15 – 30 kg)

POWER:

Two dry cell "D" type batteries* (up to 500 hours) or AC adapter
 Auto power-off function (can be set to 60 min., 20 min., or off)

OPERATIONAL TEMPERATURE:

23°F to 104°F (-5°C to 40°C)


APPROVALS:

NTEP certified CC# 02-139

WARRANTY:

1-year limited warranty

* Batteries not included

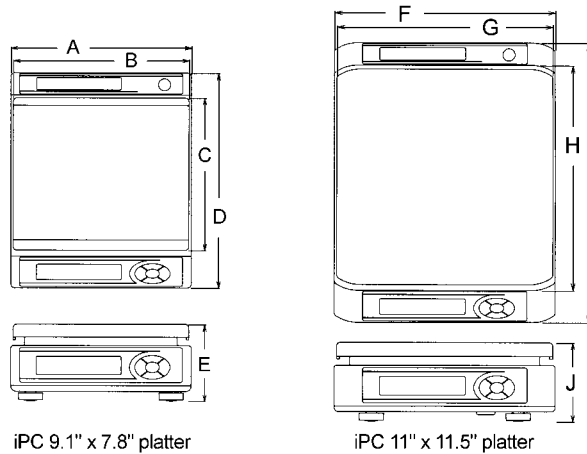

iPC DIMENSIONS	
A = 9.3"	(236.2 mm)
B = 9.1"	(231.1 mm)
C = 7.8"	(198.1 mm)
D = 11.1"	(281.9 mm)
E = 3.9"	(99.1 mm)
F = 11.3"	(287 mm)
G = 11"	(279.4 mm)
H = 11.5"	(292.1 mm)
I = 14.3"	(363.2 mm)
J = 4"	(101.6 mm)