

Intell-Lab Toploading Balances

- User Friendly Menu
- Printouts for GLP Compliance
- Under Balance Weighing
- Large Easy to Read LCD Display with Backlight
- Cast Aluminum and Steel Construction



WPT C/1


TOPLOADING SERIES

Model	WPT 6 C/1	WPT 10 C/1
Capacity	6000 g	10000 g
Readability	0.1 g	
Linearity (mg) (±)	±0.2 g	
Repeatability (mg) (Std. Dev.)	0.1 g	
Sensitivity Drift	2 ppm / ° C (18° - 30° C)	
Stabilization Time (seconds)	4	
Weighing Units	g, mg, ct, oz, oz t, dwt, mommes, gr	
Functions	Counting, percent weighing, solid & liquid density	
Tare Range	To capacity by subtraction	
Power Source	110 V, 230 V , 50 Hz, 8VA	
Construction	Cast aluminum and steel	
Display	Large, easy to read LCD display with backlight	
Pan Size	6.5 x 6.5 inches / 165 x 165 mm	
Dimensions (W x D x H)	8.1 x 12.8 x 3.2 inches / 206 x 312 x 80 mm	
Operating Environment	+ 60° F to + 85° F / + 15° C to + 30° C	
Interface (included)	RS232 bi-directional, keyboard selectable baud rate and transmission modes	
Calibration	External calibration	
Net Weight (lb/kg)	12.4 lb / 5.6 kg	
Shipping Weight (lb/kg)	22 lb / 10 kg	
Options	Printer, additional display, density kit for solids and liquids, stand for below balance weighing, anti-theft cable	

The Intell-Lab Series also includes a wide range of graphic display toploading and analytical balances. Intelligent Weighing Technology offers you an exceptional selection...so you can choose exactly the right balance for your needs.

The Intelligent Investment.

WPT C/1 Series

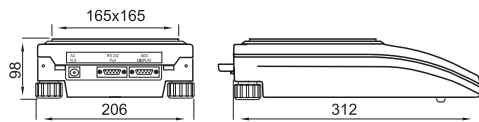

Intelligent Weighing Technology, Inc.
www.intelligentwt.com